
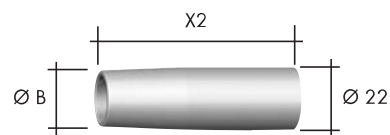


ABIMIG® GRIP A 155, ABIMIG® GRIP A 255

Consumabili



ABIMIG® GRIP A 155

ABIMIG® GRIP A 255

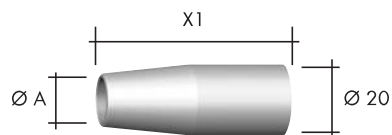



Ugelli gas (5 pcs.)

| | Ø A | X1 | | Ø B | X2 | |
|------------|------|-------|----------|------|-------|----------|
| Cilindrico | Ø 17 | 52 mm | 145.D003 | Ø 18 | 69 mm | 145.D014 |
| Conico | Ø 12 | 52 mm | 145.D001 | Ø 16 | 70 mm | 145.D011 |
| Conico | Ø 12 | 54 mm | 145.D004 | Ø 14 | 67 mm | 145.D012 |




Ug.p.corr. (10 pcs.)

| | | M6 | M6 |
|-------------|-------|----------|----------|
| E-Cu | Ø 0.6 | 140.0008 | - |
| | Ø 0.8 | 140.0059 | 140.0051 |
| | Ø 1.0 | 140.0253 | 140.0242 |
| | Ø 1.2 | - | 140.0379 |
| E-Cu per Al | Ø 0.8 | 141.0002 | 141.0001 |
| | Ø 1.0 | 141.0007 | 141.0006 |
| | Ø 1.2 | - | 141.0010 |
| CuCrZr | Ø 0.6 | 140.0855 | - |
| | Ø 0.8 | 140.0062 | 140.0054 |
| | Ø 1.0 | 140.0256 | 140.0245 |
| | Ø 1.2 | - | 140.0382 |



Supporto (5 pcs.)

| | | |
|--|------------|------------|
| | 006.D719.5 | 004.D624.5 |
|--|------------|------------|



Boccola isol. (5 pcs.)

| | | |
|--|------------|------------|
| | 767.D607.5 | 767.D637.5 |
|--|------------|------------|



| Guaine | | per 3 m | per 4 m | per 5 m |
|---------------------|-------|----------|----------|----------|
| Guaine | Ø 0.6 | 124.0011 | 124.0012 | 124.0015 |
| | Ø 0.8 | 124.0011 | 124.0012 | 124.0015 |
| | Ø 1.0 | 124.0026 | 124.0031 | 124.0035 |
| | Ø 1.2 | 124.0026 | 124.0031 | 124.0035 |
| Guaine PTFE | Ø 0.6 | 126.0005 | 126.0008 | 126.0011 |
| | Ø 0.8 | 126.0005 | 126.0008 | 126.0011 |
| | Ø 1.0 | 126.0021 | 126.0026 | 126.0028 |
| | Ø 1.2 | 126.0021 | 126.0026 | 126.0028 |
| Guaine grafite PTFE | Ø 0.6 | 127.0002 | 127.0003 | 127.0004 |
| | Ø 0.8 | 127.0002 | 127.0003 | 127.0004 |
| | Ø 1.0 | 127.0005 | 127.0007 | 127.0008 |
| | Ø 1.2 | 127.0005 | 127.0007 | 127.0008 |