

# FOX 185 Flex-Line



## INCLUDED

- 23000424 · MIG torch 15 AK · 3 m
- 21910116 · Flux Core welding wire reel 0,5 kg · Ø 0,9 mm
- 43210138 · Ground cable · 16mm<sup>2</sup> · 2 m
- 43205114 · MMA Welding cable · 16mm<sup>2</sup> · 3 m
- 22905090 · Pressure regulator ECO Mini CO<sub>2</sub>
- 22910014 · Adaptor for gas bottle
- 33805003 · Drive roll Ø 30mm · 0,6 - 0,8 mm
- 33805067 · Drive roll Ø 30mm · 1,0 - 1,2 mm Knurled groove



## OPTIONAL


- 99900195 · Trolley
- 99900258 · HD AIR Trolley



	FOX 185					
Input voltage	(1ph) 115V 50/60Hz			(1ph) 230V 50/60Hz		
Power 60%	1,9 KVA			2,8 KVA		
	MMA	TIG	MIG	MMA	TIG	MIG
U <sub>o</sub>	80 V	9,5 V	60 V	80 V	9,5 V	60 V
Amp. Min-Max	20 ÷ 100 A	5 ÷ 110 A	25 ÷ 120 A	20 ÷ 170 A	5 ÷ 170 A	25 ÷ 170 A
Duty Cycle 40°C	100A 40% 65A 100%	110A 40% 70A 100%	120A 40% 75A 100%	170A 25% 110A 60%	170A 25% 110A 60%	170A 25% 110A 60% 85A 100%
Steel	0,8 ÷ 1,0 Ø mm					
Stainless Steel	0,8 ÷ 1,0 Ø mm					
Flux Core	0,8 ÷ 1,0 Ø mm					
Aluminium	0,8 ÷ 1,0 Ø mm					
Brazing	0,8 ÷ 1,0 Ø mm					
Ø Electrode	1,6 ÷ 3,25 Ø mm					
Electrode Type	6013 - 7018 - CrNi					
Insulation	H					
Protec. Degree	IP22S					
Dimens. (LxWxH)	480x220x385 mm					
Box (LxWxH)	685x275x450 mm					
Weight box/net	16 / 12 Kg					
Code	99820039					

# Fox

MULTIPROCESS INVERTERS

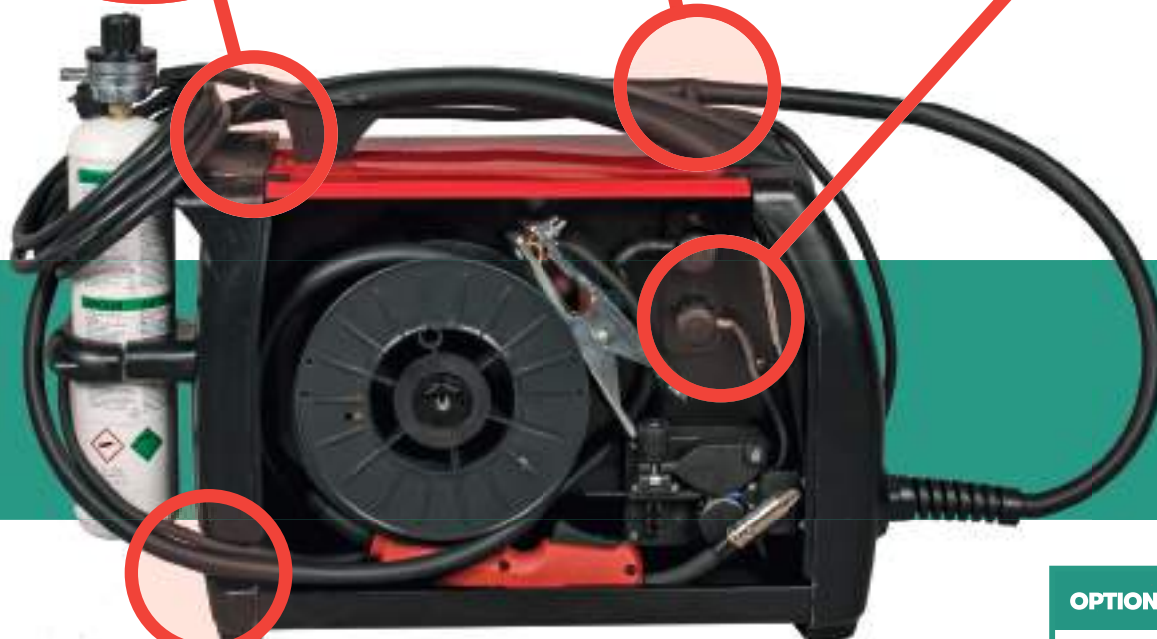

**OPTIONAL "FULL GAS"**

**Trolley**  
99900195

**OPTIONAL "EASY GAS"**

Gas regulator	
22905001	
Disposable Gas cylinders	
Plastic Support	
04600404	